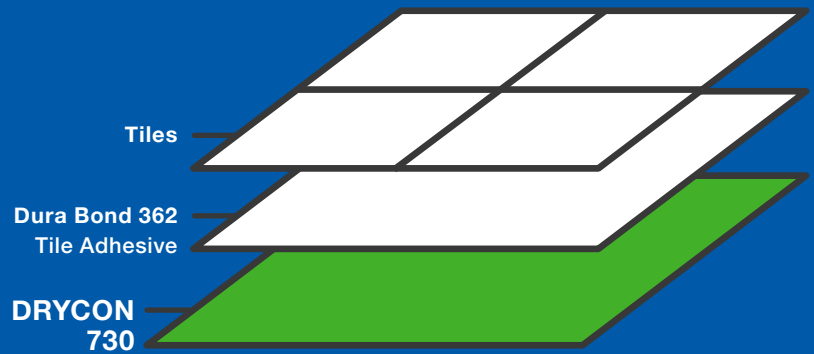


**STÄRKEN****Drymix  
Solutions**

TM

**Flooring & Concrete Series**

# DRYCON 730

**Grade 30 Strength  
Prepacked Concrete****A + B Drymix Solution****A + B prepacked high grade dry-mixed  
concrete solution. 30 MPa in 28 Days****Uses**

- Flooring up to 100 mm
- Concrete for household use, such as table top or stove top

**Benefits**

- Shrinkage compensated to prevent cracks
- Can be applied as 100 mm flooring in 1 coat
- High compressive strength
- Easy to mix, only need to add water
- 2 parts system, no need to prepare cement, sand and aggregate

**Complied Standard****| EN 998 | EN 1015 |****[www.starkendrymix.com.my](http://www.starkendrymix.com.my)**

## Flooring & Concrete Series

# DRYCON 730

Grade 30 Strength  
Prepacked Concrete

**A + B**

Drymix Solution



### TECHNICAL PROPERTIES

|                      |                        |
|----------------------|------------------------|
| Compressive Strength | > 30 N/mm <sup>2</sup> |
| Dry Shrinkage        | < 1.5 mm/m             |
| Abrasion Resistance  | Good                   |

### PHYSICAL FEATURES

|                       |  |
|-----------------------|--|
| Package               | Part A: 40 kg Drymix Powder<br>Part B: 20 kg Aggregate |
| Water Demand          | 6.4 - 8.0 ℓ (16 - 20%)<br>to Part A                    |
| Yield                 | 25 - 26 ℓ Wet Concrete                                 |
| Binder                | Cement, Green Binder                                   |
| Aggregate Size        | 10 mm  |
| Application Thickness | 11 - 13 m <sup>2</sup> /ℓ                              |
| Pot Life              | 1 hour   |

### STORAGE

Shelf life is 6 months if stored in dry and cool place

### RECOMMENDATION

Mix Part A with water to homogenous slurry, then add Part B for slightly mixing

### APPLICATION

#### SUBSTRATE PREPARATION

- 1 Prepare formwork
- 2 For flooring, floor should be free of dust and contaminant. Apply **Bond Buddy 168** as priming coat on smooth or old concrete

#### MATERIAL PREPARATION

- 1 Mix 1 bag of 40 kg **DRYCON 730** Part A with 6.4 – 8 ℓ water for at least 3 minutes by electrical mixer until homogeneous consistency
- 2 Add 20 kg **DRYCON 730** Part B, mix completely to obtain ready-to-use concrete
- 3 Fill up formwork and trowel smooth
- 4 Apply up to 100 mm thickness in 1 coat for flooring
- 5 After 7 days, the concrete is ready to receive tiling

#### CURING

- 1 Recommended to apply water curing or cover by wet hessian at first 2 days

### SAFETY

Wear NIOSH approved facemask during mixing as to avoid inhaling of dust. May cause irritation to eyes and skin:

- 1 In case of contact with eyes, rinse immediately with water and seek for medical advice if needed
- 2 In case of contact with skin, rinse immediately with soap and water. To seek medical advice if needed

Starken Drymix Solutions Sdn. Bhd.

201001032580 (916505-X)

A-1-3A, Pusat Perdagangan Kuchai,  
No.2, Jalan 1/127, Off Jalan Kuchai Lama,  
58200 Kuala Lumpur, Malaysia.

T: +603-7982 8066 F: +603-7983 8066

Ver 1.1