


**STÄRKEN**

**Drymix  
Solutions**

TM

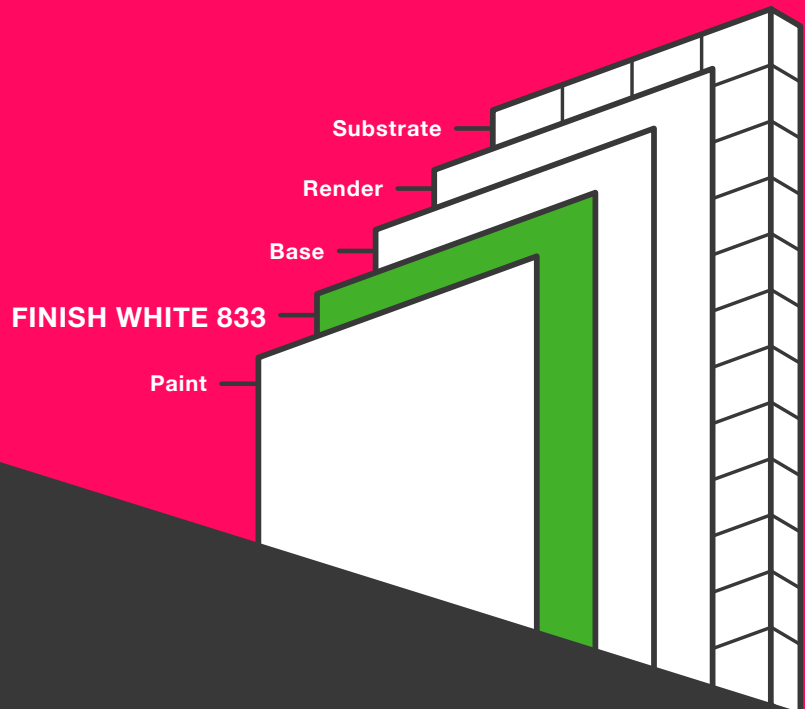

**Skim Coat Series**

# FINISH WHITE 833

**POLYMER MODIFIED  
FINISHING COAT**

**Polymer modified white cementitious skim coat. Can be used as a finishing coat to receive paint for wall and ceiling**

#### **Uses**

- Exterior and interior skim coat wall/ceiling finishing coat
- Suitable for concrete, plaster and render surface
- Hardened surface can be sanded, painted and wall papered

#### **Benefits**

- Water resistant
- Ultra-smooth finishing
- Polymer modified and shrinkage compensated to prevent hair line cracks

**Complied Standard**

| EN 998 | EN 1015 | BS 4551 |

**[www.starkendrymix.com.my](http://www.starkendrymix.com.my)**

## Skim Coat Series

# FINISH WHITE 833

## POLYMER MODIFIED FINISHING COAT



### TECHNICAL PROPERTIES

Adhesive Strength	> 0.5 N/mm <sup>2</sup>
Water Retentivity	> 99%
Alkaline Resistance	Good

### PHYSICAL FEATURES

Package	Approx. 25kg
Water Demand	11 - 12 ℓ (44 - 48%)
Consumption	1.1 kg/m <sup>2</sup> /mm
Binder	Cement, Green Binders
Filler Size	< 0.3 mm
Application Thickness	1 - 2 mm per coat
Pot Life	2 hours

## STORAGE

Shelf life is 6 months if stored in dry and cool place

**Starken Drymix Solutions Sdn. Bhd.**  
201001032580 (916505-X)

A-1-3A, Pusat Perdagangan Kuchai,  
No.2, Jalan 1/127, Off Jalan Kuchai Lama,  
58200 Kuala Lumpur, Malaysia.

T: +603-7982 8066 F: +603-7983 8066

Ver 1.0

# STARKEN

## Drymix Solutions

TM

## RECOMMENDATION

- 1 To be applied on **Base White 823** or **Panel Plaster 638**
- 2 Mix with **Mortar Buddy 152** for application on painted surface
- 3 **Moisture Sealer 186** is recommended for application on gypsum board surface, prior to skim coating works

## APPLICATION

### SUBSTRATE PREPARATION

- 1 Substrate should be free from mould oil, grease, loose particles and contamination of foreign materials
- 2 Dampening of concrete or plastered substrate is recommended prior to the application of **Finish White 833**

### MATERIAL PREPARATION

- 1 Mix 1 bag of 25kg **Finish White 833** with 11 - 12 ℓ water for at least 3 minutes by electrical mixer until homogeneous
- 2 1 - 2 mm thickness can be applied in 1 coat. After the previous coat is hardened, 2 coats can be build-up and total thickness up to 4mm
- 3 Sand paper polishing is advised to apply within 48 hours
- 4 Paint can be applied at least 3 days after application to reduce the alkalinity

### CURING

- 1 Natural air curing is sufficient
- 2 Recommended to apply water mist curing in first 2 days during hot climate

## SAFETY

Wear NIOSH approved facemask during mixing as to avoid inhaling of dust. May cause irritation to eyes and skin:

- 1 In case of contact with eyes, rinse immediately with water and seek for medical advice if needed
- 2 In case of contact with skin, rinse immediately with soap and water. To seek medical advice if needed